

How to Measure for a Truck, SUV, Minivan or Van Ramp



General Guidelines - Wheelchair Ramps for Vehicles

- Trifold Ramps are the Recommended Ramp Style.
- Most Vehicles will require a 6-8 foot long ramp.
- Full Size Vans, Trucks or SUV's will require a 8-10 foot ramp.
- Never Compromise Safety


How to measure for the Back door of a Van, Minivan or SUV

1. Determine the Rise by measuring from the ground up to the highest point you will need the ramp to reach. (straight up & down with no angle)
2. Compare your Rise to the included Chart or the Wheelchair Ramp Wizard on our Website, www.expressramps.com

Tip: If you would like to use the ramp on both doors, get the correct length ramp for the Higher Rise (usually the back door).

How to measure for the Side door of a Van or Minivan (see image below)

1. Measure the Opening of the Side Door. It must open a minimum of 30 inches wide or the ramp will not fit.
2. Determine the Rise by measuring from the ground up to the highest point you will need the ramp to reach. (straight up & down with no angle)
3. Compare your Rise to the included Chart or the Ramp Wizard on our Website, www.expressramps.com

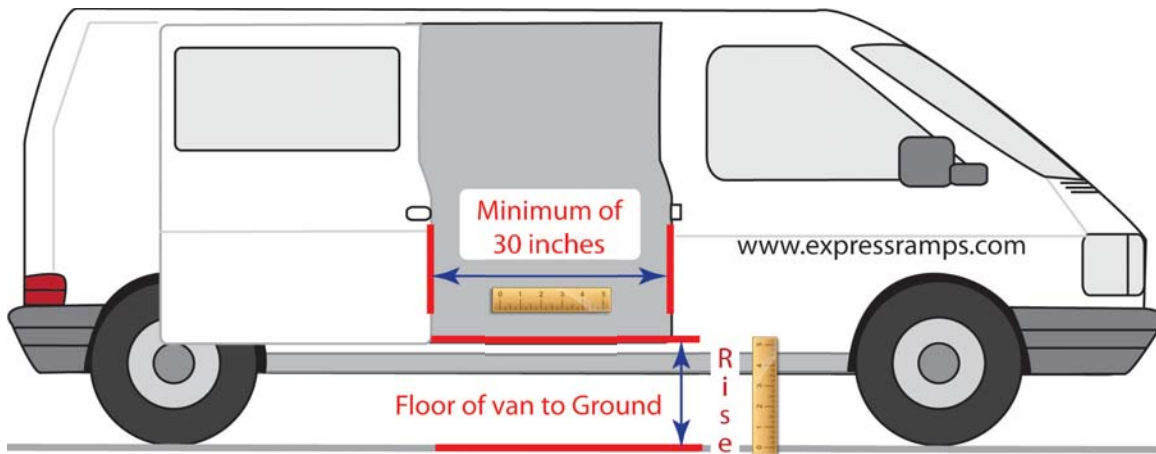

Using a ramp that is too short can cause usage and safety issues. A ramp that is too short will be steeper, so power equipment may lose traction and/or may not be able to pull itself up. If the change in angle from the ramp into the back of the vehicle is too great, most power wheelchairs/scooters will bottom out (due to low ground clearance on most equipment) making loading difficult.